

COMPACT 10 / 12 DX

OUTSTANDING ROUGH TERRAIN DRIVING FEATURES

> 4 wheel drive
> Automatic differential lock
> Excellent gradeability (40 %)
> Ground clearance of 28 cm

ROBUST AND EASY TO MAINTAIN

> Outriggers positioned within the machine footprint
> Durable and reliable upper control box
> Optimized accessibility to components
> Built-in diagnostic tool

EXCEPTIONAL PRODUCTIVITY


> Fully proportional controls
> Narrow turning radius
> One switch to deploy and retract 4 outriggers

COMPACT 10 / 12 DX

ROUGH TERRAIN SCISSOR LIFTS

TECHNICAL DATA

	COMPACT 10 DX	COMPACT 12 DX
Working height	10.28 m	12.06 m
Platform height	8.28 m	10.06 m
Lift capacity	565 kg (3 pers.)	450 kg (3 pers.)
Lift capacity on the extension	150 kg	150 kg
A Length	3.18 m	3.18 m
B Width	1.78 m	1.78 m
C Height - stowed	2.44 m	2.56 m
D Wheelbase	1.84 m	1.84 m
E Ground clearance	28 cm	28 cm
Storage height	1.59 m	1.7 m
F Platform length	2.45 m	2.45 m
G Platform width	1.45 m	1.45 m
Extended platform length	3.7 m	3.7 m
Platform extension length	1.2 m	1.2 m
Number of extensions	1	1
Drive speed	0.6 - 5.5 km/h	0.6 - 5.5 km/h
Maximum drive height	8.15 m	8.15 m
Turning radius - outside	3.5 m	3.5 m
Lift / lower speed	35 s / 46 s	35 s / 51 s
Engine	Kubota, 18.5 kW (Stage 5 in EU)	Kubota, 18.5 kW (Stage 5 in EU)
Gradeability	40 %	40 %
Tilt alarm	3 °	3 °
Tyres - foam-filled	26 x 12 - 16.5	26 x 12 - 16.5
Hydraulic system capacity	75 l	75 l
Weight	3 350 kg	3 965 kg

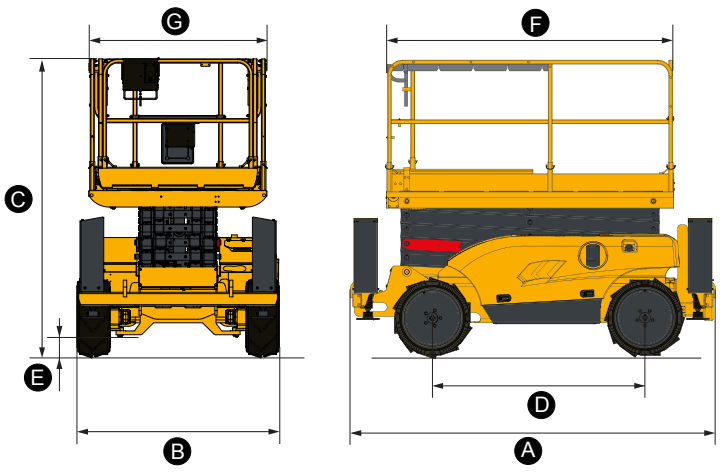


STANDARD EQUIPMENT

> 4 wheel drive, 2 wheel steer
> Brake release
> Foam filled all terrain tyres
> 1.2 m platform extension
> Removable operator's control box
> 3° Tilt alarm
> Automatic levelling outriggers
> Horn
> Hourmeter
> 12 V - 70 Ah batteries
> Hydraulic brakes
> Manual platform lowering valve
> Lanyard attachment points
> Towing hooks
> Side shields

OPTIONS AND ACCESSORIES

> Non marking tyres
> 110 V power to the platform
> Swing-door gate
> Hydraulic generator 3.5 kW
> Biodegradable oil
> Cold Weather Package
> Telematics ready
> Motion alarm for movements and translation
> Travel alarm
> Rotating beacon
> Working light
> Foldable guard-rails

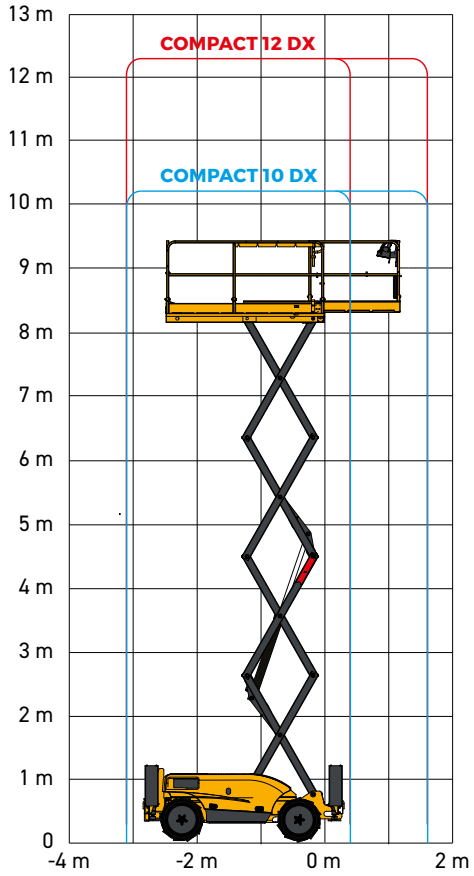

2420003620 · Non contractual document · We reserve the right to modify the technical characteristics of this document without notice · 12/2020